



# Versamag™-Polymer





- California Approved (CTEP)  
Both HOT & COLD
- National Approved (NTEP)  
Both HOT & COLD
- NSF-61-G
- Meets AWWA C708
- Pulse output

The polymer Versamag™ is the most versatile multijet type water meter for submetering applications. Along with its compact design, the removable register allows for pressure tests and line flush outs without damaging the internal components. The Versamag is capable of being installed in both horizontal and vertical positions while adhering to AWWA C708 accuracies. With all of these features the Versamag™ is the complete meter for any submetering applications.

\* Cannot be installed vertically in California or NTEP states.

### Technical Characteristics

Material .....	50% glass-reinforced nylon polymer
Max Flow Rate .....	20 gpm
Normal Flow Range(+/- 1.5%) .....	1-20 gpm
Nom Flow Rate .....	15 gpm
Min Flow Rate(+/- 3%) .....	¼ gpm
Max Work Pressure .....	150 psi
Max Work Temp .....	105°F (Cold), 160°F (Hot)
Nom Pipe Size .....	¾"
Pulse Value .....	1/10gal

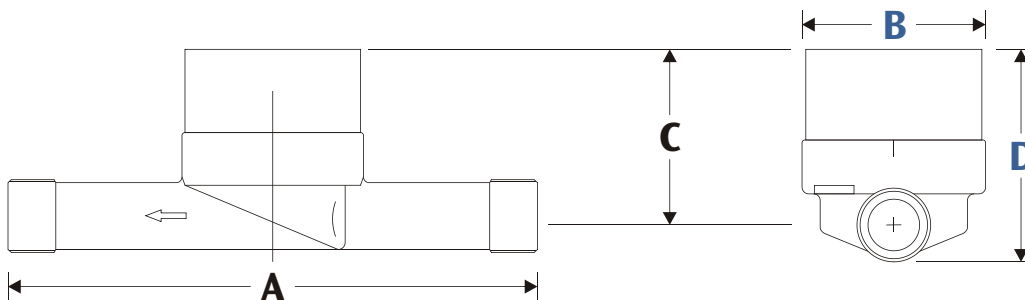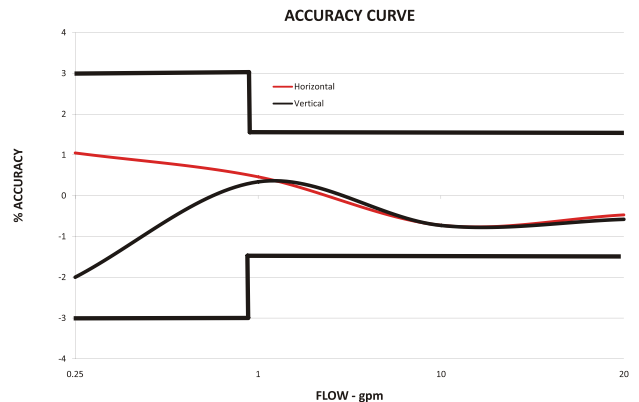

<b>A</b>	<b>- 7.5"</b>
<b>B</b>	<b>- 2.5"</b>
<b>C</b>	<b>- 3.6"</b>
<b>D</b>	<b>- 4.2"</b>
<b>Wt</b>	<b>0.75lb</b>